


PREFIT - Screw in Shelf Supports

Tel: 020 8961 4777

Brackets and Angle Plates - 660-662

Fax: 020 8961 4747

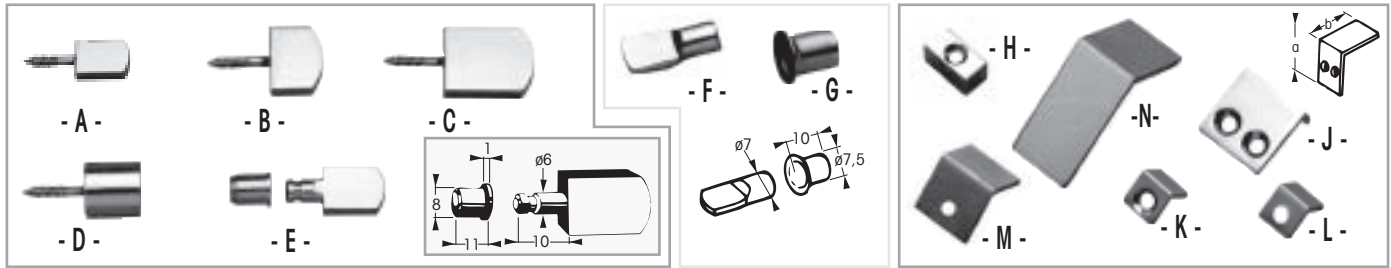

	ADLER® brass brackets with pig-tail shank.		chrome	gold-plated					
- A -	flat 15 x 10 mm, screw 15 mm	660 01R	660 02S						
- B -	flat 15 x 20 mm, screw 20 mm	660 03T	660 04U						
- C -	flat 25 x 20 mm, screw 20 mm	660 07X	660 08Y						
- D -	cylindrical 15 x 15 mm, screw 20 mm x 4	660 20M	660 21N						
	ADLER® brass brackets with sockets, 17 x 13 mm.		chrome	brass					
- E -		660 22P	660 23Q						
	Brass sockets alone, for above brackets and swivel clips (630).		rough	hot-finned					
		660 30X	660 31Y						
	Steel brackets alone.		nickel plated	brass-plated					
- F -		660 24R	660 25S						
	Sockets alone for above brackets.		nickel plated	brass-plated					
- G -		660 26T	660 27U						
	ADLER® brass brackets square 8 mm. Length 15 mm. With woodscrews.		chrome	brass					
- H -		660 32Z	660 33A						
	ADLER® chromium-plated brass angle plates, two holes drilled on one arm, external milling. With woodscrews.								
	arm in mm	20 x 10	25 x 10	30 x 30					
	width x thickness in mm	20 x 2	20 x 1,5	10 x 1,5					
- J -		662 10T	662 22G	662 24J					
	ADLER® chromium-plated brass angle plates, drilled on one arm, internal or external milling. With woodscrews.								
		1,5 mm thick			2 mm thick				
	arms in mm a x b	10 x 10	15 x 15	25 x 10	25 x 10	30 x 10	20 x 10	20 x 10	20 x 15
	width in m	10	15	10	15	10	10	20	15
- K -	external milling	662 01J	662 04M	662 18B	662 20D	662 23H	662 06P	662 12V	662 14X
- L -	external milling	—	662 34U	—	—	—	662 36W	—	—
	ADLER® brackets. 2 mm thick for securing checkerboard mirrors, both arms drilled, reverse countersink. Polished brass. With woodscrews.		chrome	brass					
- M -	20 x 20 x 20 mm	660 05N	660 08R	20 x 20 x 20 mm					
	ADLER® brass angle plates, 40 x 40 x 3 mm, width 20 mm, not drilled.		chrome						
- N -		662 61Y							