





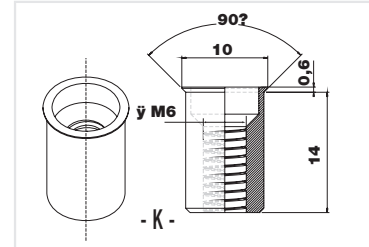



## Screws and Assembly Accessories - 659a

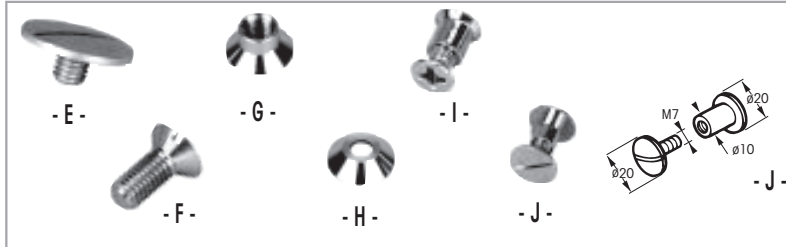

- E -	M6 split head screw, length 6.5 T20. Used chiefly for securing closure knob 699 50J (and onwards), mounted alone.	mat nickel		
		<b>659 08Q</b>		
- F -	M6 split head screw, length 16, T12. Used chiefly with countersunk nut 659 72K for transforming bracket 632 85P into a double bracket.	mat nickel		
		<b>659 30P</b>		
- G -	M6 countersunk nuts. Used with screws 659 30P and 659 67D.	mat nickel		
		<b>659 72K</b>		
- H -	cone-shaped washers. Used as reduction cones for securing fittings 635, 639 and bracket 632 85P with woodscrews, max dia. 4 mm.	mat nickel		
		<b>659 70H</b>		
- I - - J -	tightening elements, screws and cap nuts, for counterplate clip.  M6 screw 90° countersink, dia. 12, HC dia. 9 (clamped thickness 13 to 17) dia. 20 round head, M7 split screw nut, dia. 10 (clamped thickness 15.5 to 23)	chrome	polerowany	
		<b>659 01H</b>	<b>659 02J</b>	
		<b>659 10S</b>	<b>659 11T</b>	
- K -	M6 crimp nut for 0.5 to 3 mm thick metal to be used especially for mounting clips 504 on tube.			
		<b>659 21D</b>		
-	unit comprising : 1 dia. 20 mm round head button, one M4 screw 90° countersunk, length 8, 2 plastic washers, 6 x 19 and 9 x 19, used chiefly for securing the intermediate showcase roller track 600a, more than 1 m long.	chrome	alu grey	black
		<b>659 51M</b>	<b>659 52N</b>	<b>659 53P</b>
-	M4 metal screw, 90° countersunk, length 8, dia. 6 head.	nickel plated		
		<b>659 48J</b>		

## 659b - Cork Shims, Sockets, Protection Washers

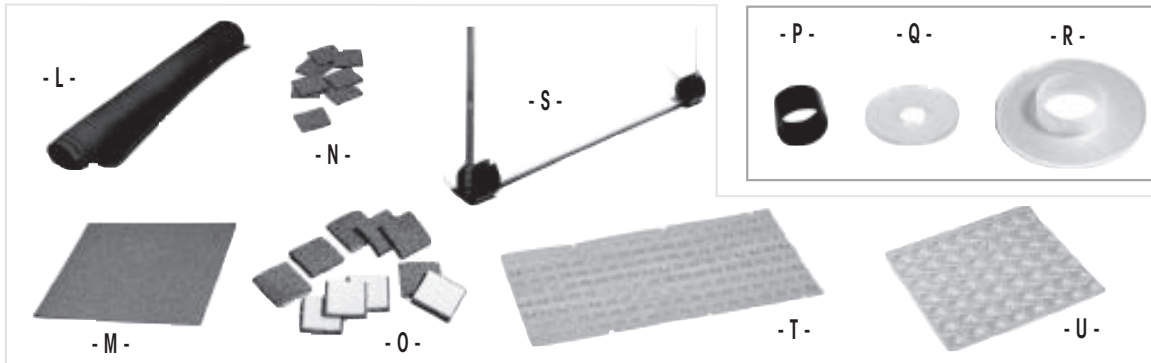

- L -	Butyl bound cork sheets, format 90 x 60 cm, 1 mm thick.	659 20C
- M -	Adhesive cork sheets, pre-cut into 256 15 x 15 mm adhesive shims. Format 24 x 24 cm, 2 mm thick.	by 1280 shims 659 22F
- N -	20 x 20 mm adhesive cork shims ; thickness 1 mm. Supplied in bulk.	659 24H
- O -	Cork and foam blocks. 18 x 18 mm, 2+2 mm thick. For use as spacers.	roll of 12,500 blocks 659 27L
-	Transparent PVC shims 39 x 22 x 1mm.	659 28M
- P -	White PVC sockets, outer dia. 10 mm, inner dia. 9 mm, length 8 mm.	659 50L
- Q -	Simple seal washers, transparent PVC, for nuts and bolts and handle shanks.	inner dia. x outer dia. mm    6 x 19    9 x 19    10 x 30 659 60W    659 62Y    659 64A
- R -	Seal washers (200 identical items).	 659 68F
-	Black O-ring joints, 11.1 x 1.6, mainly used on bracket 632 85P.	659 65B
- S - - S -	Cylindrical rubber shock absorber.	length : 18 for 6 to 7.5 mm thick glass 659 29N length : 27 for 10 to 11.5 mm thick glass 659 39Y
- T - - U -	Adhesive crystal bumpers.	dia. 7.9 mm. Plate of 408 stops 659 31Q dia. 12.7 mm. Plate of 56 stops 659 23G